



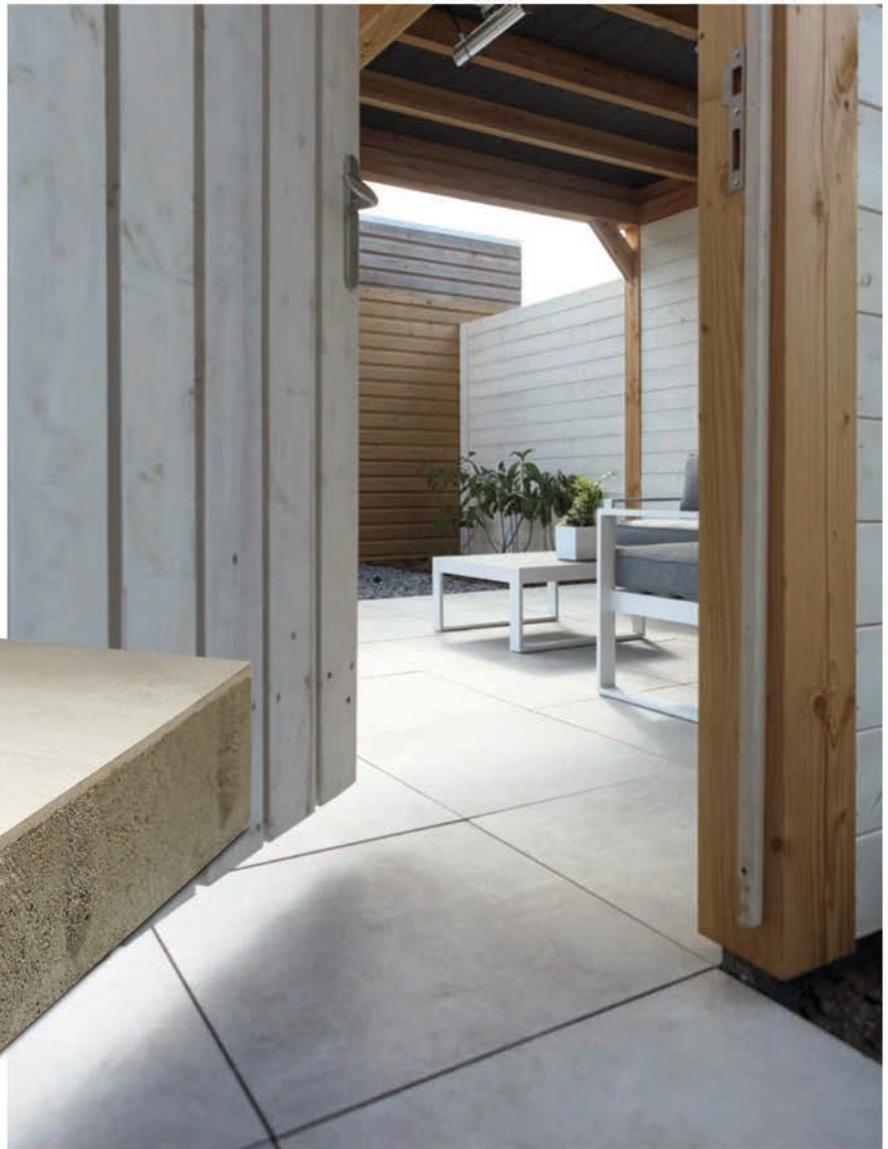

GeoCeramica combines the low-maintenance and modern aesthetic of porcelain tile with the ease of installation of concrete pavers. GeoCeramica binds a 1cm porcelain tile to a concrete paver base using a proprietary Aquaferm binding agent.

- Suitable for patios, paths, pool decking and rooftop applications
- Slip-resistant porcelain top layer with multiple faces, integrated Stabilkorn® drainage paver base with small auto-spacers
- Resistant to chemicals, staining, fading, fire, scratching and heavy wear

Colors on back.

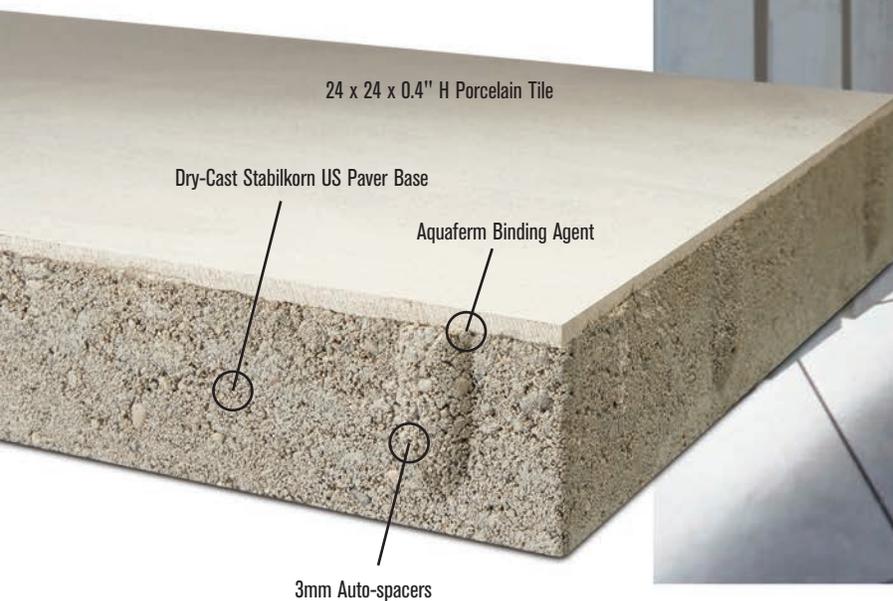

Dimensions	Area (ea.)	Weight (ea.)	Units/pallet	Pallet Weight
24 x 24 x 1.6" H	4 sq. ft.	TBD lbs.	TBD (sq. ft.)	TBD lbs.

### Easy to Install...

GeoCeramica installs just like a traditional paver over a densely-graded base, open-graded base or Alliance Gator Base – saving you time and money compared to overlay installation. GeoCeramica pavers are manufactured with a 3mm auto spacer, joints are easily filed with Alliance Gators® G2 Gator Maxx/Super Sand or Nitro Joint Sand. Use Xtreme Edge or Mini-Pro for edging restraint. These pavers can be cut with a water-cooled cut-off saw using a non-segmental diamond blade. Use caution when handling to prevent edge damage. Use roller compactor or buffer pad when compacting. Refer to actual product samples when making color selection.



4675-B Canton Hwy, Cumming, GA 30040  
 Phone: 470-239-8727 • Fax: 470-695-4160  
[southatlanticcp.com](http://southatlanticcp.com)

©Copyright 2024. All Rights Reserved. This information has been prepared for the benefit of customers interested in South Atlantic Concrete Products. It was reviewed carefully prior to publication. Rochester Concrete Products assumes no liability for its accuracy or completeness. Final determination of the suitability of any information or material for the use contemplated, or for its manner of use, is the sole responsibility of the user. 424

Manufactured by:



**GEOCERAMICA®** PORCELAIN + PAVER COLORS

